
Oframework

Install Bezel

Written By: Sandy Qualey-Dobson

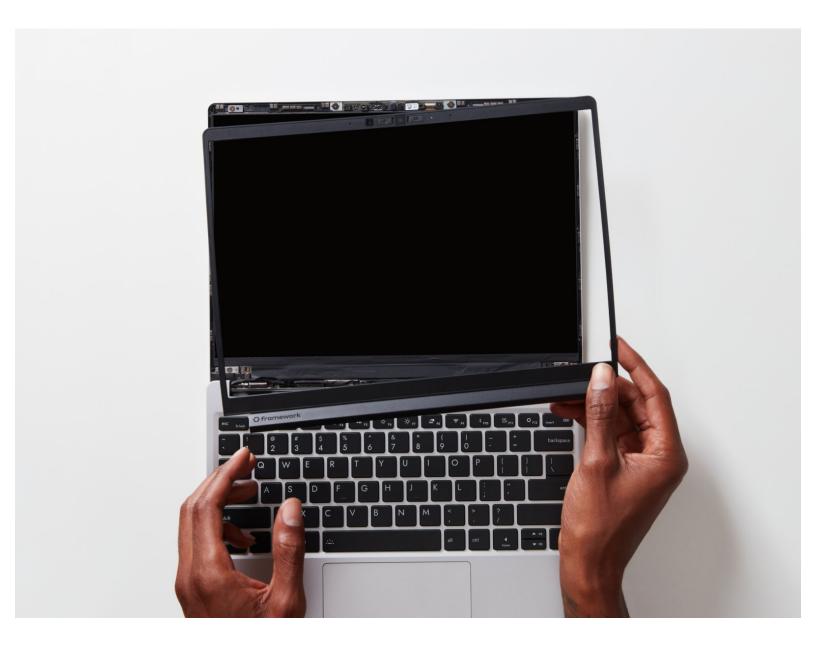

This document was generated on 2023-12-24 02:11:34 PM (MST).

Step 1 — Remove the adhesive from the Bezel



• If installing a new Bezel, remove the liner pieces on the bottom of the Bezel to expose the adhesive.

This document was generated on 2023-12-24 02:11:34 PM (MST).

Step 2 — Install the Bezel



- Open the Framework Laptop 180 degrees to attach the Bezel.
- Starting with the bottom of the Bezel which covers the hinges and cables, align the corners of the Bezel to the display and place it down. The Bezel is attached by magnets and should easily click into place.
- We recommend feeling along each edge of the Bezel to make sure it is seated correctly before proceeding, if it doesn't seem to be sitting flush, lift it back up and try lowering it into place again.
- Do not try to install the Bezel without first opening the Laptop fully, doing so could damage the Bezel and potentially the Display.
- ▲ If the bottom of the Bezel doesn't seem to fit, lift it back off and check that the cables are seated correctly on both sides. If the Bezel doesn't seem to fit at all, please contact support and do not force it into place.

This document was generated on 2023-12-24 02:11:34 PM (MST).