



Input Cover Removal

Removal of the Input Cover on the Framework Laptop

Written By: Jehan Suleman



INTRODUCTION


You can follow these steps to remove the Input Cover from your Framework Laptop safely, to get inside for further repairs and upgrades.



TOOLS:

- [Framework Screwdriver](#) (1)
-

Step 1 — Unscrew the five fasteners on the Bottom Cover

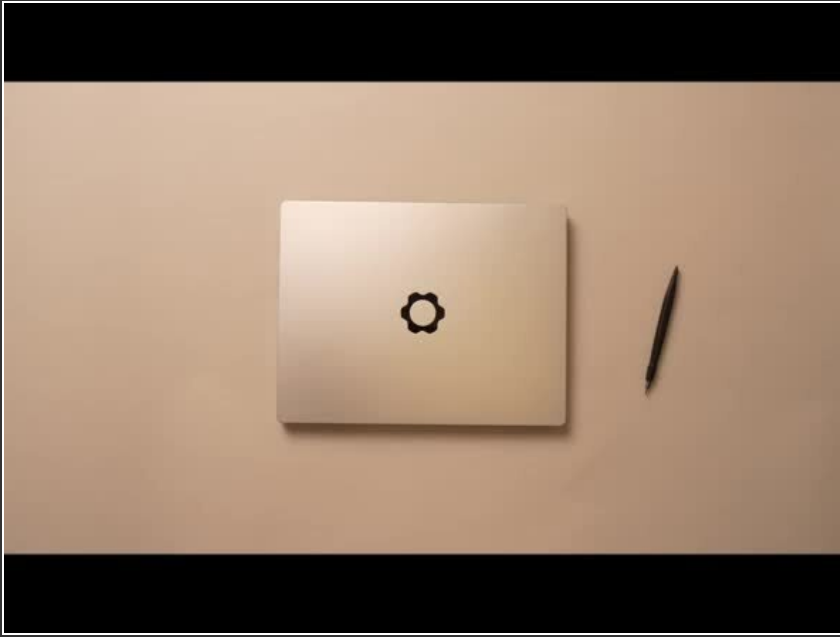

- Close the lid on your Framework Laptop and place it upside down on a soft, non-marring surface, such as the bag that it shipped in.
- Using the T5 bit in the Framework Screwdriver, unscrew the 5 fasteners on the Bottom Cover. These fasteners will remain attached in the Bottom Cover so that you do not lose them.
- The fastener on the bottom left (circled in red) will not unscrew as far as the others, as it is acting as a lifter for the Input Cover.

⚠ You'll hear this fastener start clicking as you rotate when it is unscrewed far enough.

⚠ Do not use a powered tool for these steps, as this will likely result in damage to the fasteners.

Step 2 — Lift up and flip over the Input Cover





- Flip the Framework Laptop back over and open the lid to around 120 degrees.


⚠ Important: Pull the Input Cover off carefully as it is still attached to the Mainboard via the Touchpad Cable. You don't need to disconnect this cable to do most repairs. You can just flip the Input Cover over. If you do want to disconnect it though, make sure to disconnect the Mainboard side using the finger loop over the orange label.

- The bottom right corner of the Input Cover lifts up when the five fasteners are properly unscrewed from the previous step. You should not have to use any excessive force to remove the Input Cover.
- Carefully lift the cover up from the bottom right corner. If you need to, you can use the spudger end of the Framework Screwdriver to lift it as well. Lift the Input Cover off the Mainboard, flip it over (keyboard side down), and place it about halfway on the Bottom Cover.

⚠ Be sure not to put too much force on the Touchpad Cable when doing this.

 If the LEDs on the left and right sides of the system are flashing red when you lift off the cover, it means the system is still powered on. Make sure your power cable isn't plugged in and that you have shut down correctly.

 Note that it may take up to 30 seconds after shutting down for the system to fully power off. Wait until the LEDs stop flashing before proceeding.

 **You should keep the Battery connector plugged in unless you need to replace the Battery, Mainboard, or Speakers. This connector is easy to accidentally damage, so it's better to not handle it.**
